

# VF1 INSTRUCTION MANUAL


## List of components

60mm wood screws x 2  
M4x8mm x 4  
M5x10mm x 4  
Washers x 4


Wall plugs x 2  
M4x12mm x 4  
M5x12mm x 4

CONSULT AUTHORISED SERVICE PERSONNEL FOR THE INSTALLATION OF THIS UNIT. INSTRUCTIONS MUST BE FOLLOWED PRECISELY FOR SAFE AND STABLE INSTALLATION. RAW INTERNATIONAL ARE NOT LIABLE FOR ANY DAMAGE OR INJURY CAUSED BY MISHANDLING OR IMPROPER INSTALLATION.


VESA® IS A REGISTERED TRADEMARK OF THE VIDEO ELECTRONICS STANDARDS ASSOCIATION.

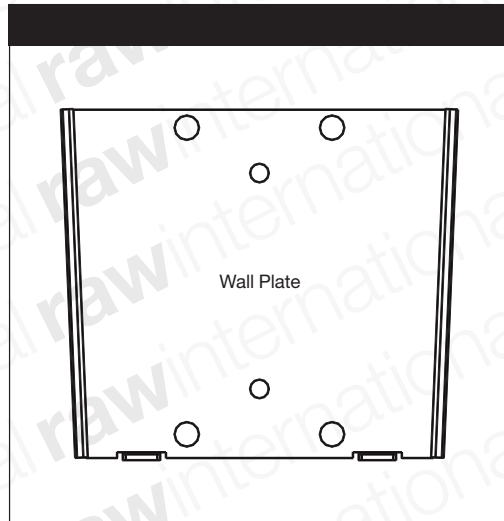

Use the 60mm wood screws, mount the wall plate to wall stud or use enclosed sheet rock mollys.



**Note:** Bracket is intended for use on LCD monitors up to 66lbs.

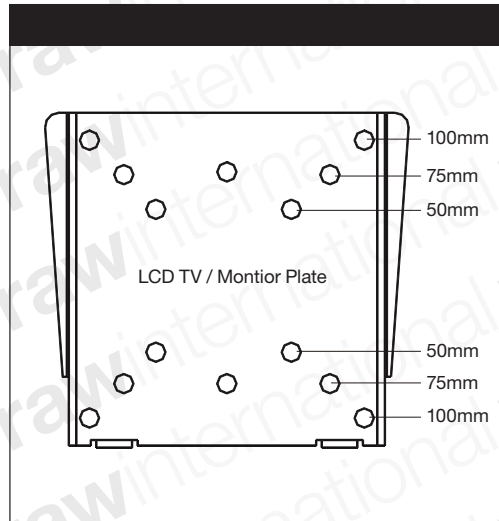

Use either of the M4 or M5 bolts to mount the monitor plate to back of monitor, (Note: corners holes to accommodate both 75mm or 100mm VESA systems).




Use the M4x8mm bolts to lock and secure your monitor in place.




## Step 1a

Using the 60mm wood screws, mount the wall plate to wall stud.

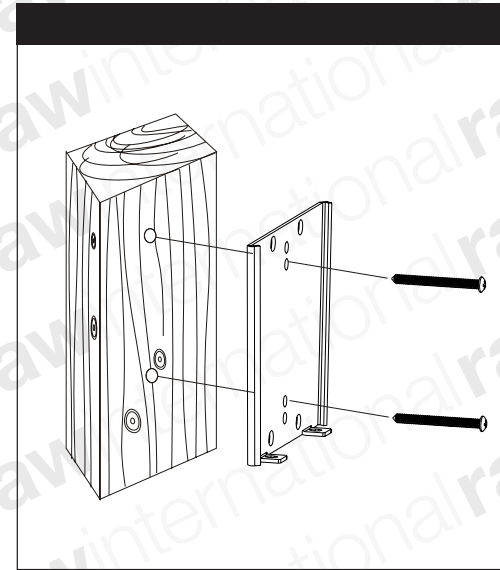


## Step 1b

Using the 60mm wood screws and concrete anchor mount the wall plate to wall.

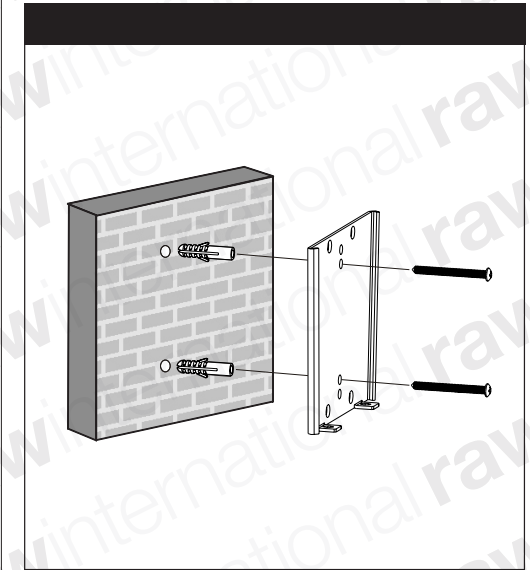

## Step 2

Using either of the M4 or M5 bolts, mount the monitor plate to back monitor, Depending on your monitor, Use the 75mm or 100mm pre-drilled holes.

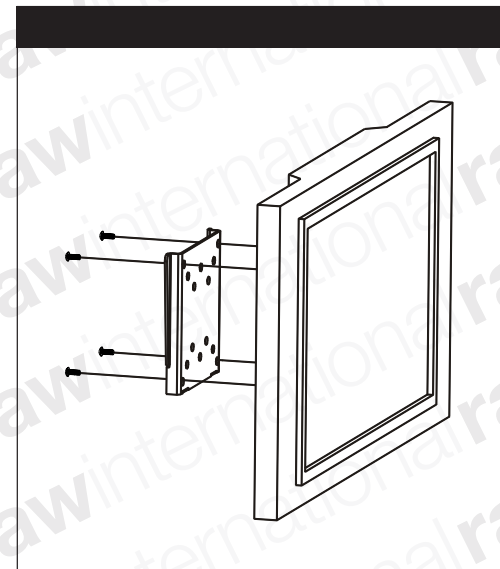

## Step 3

Simply slip your monitor onto your wall mount, and secure with M4x8mm locking 4 bolts from below, and you are finished! Enjoy!

